

HSF

NOTES:


Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%GF UL94V-0

Ordering Information


2135T - 1 XX S XX X Y N T 1

No. of Pins per Row: 52-40PIN
 Contact Plating: A=AgBT, T=Tube
 Insulator: G=100%Gold, C=PAVT
 Contact Flash: G4=15μ"Gold, G5=30μ"Gold, S0=Gold Flash/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin, SN=Tin, SM=Matte Tin

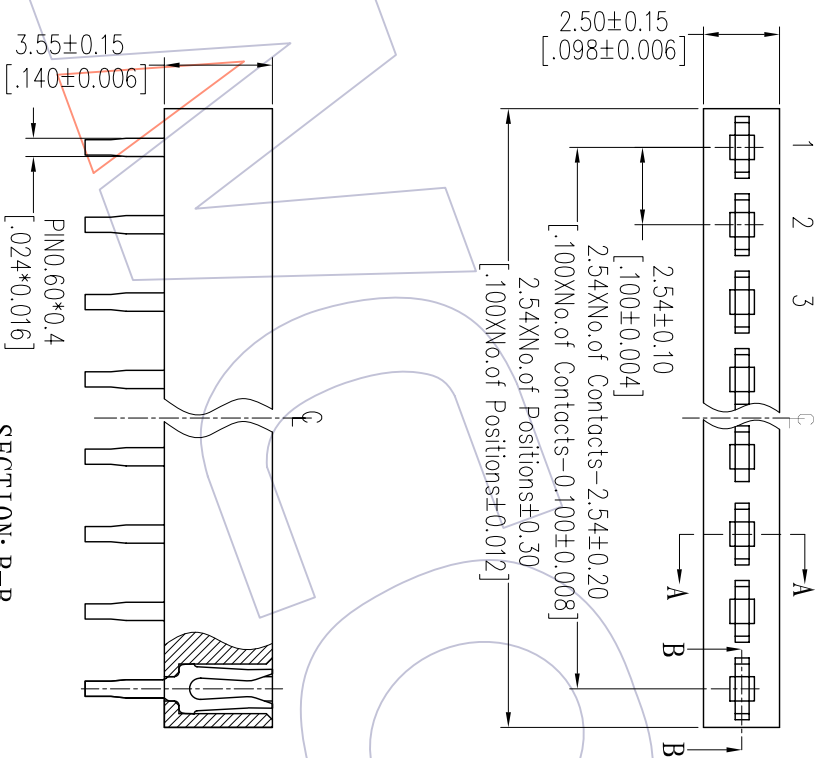

SECTION: B-B

SECTION: A-A

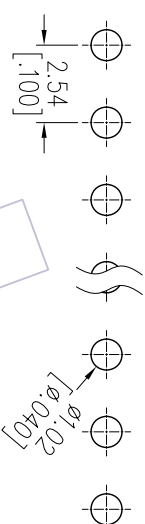

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuang	2012/08/02	mm		2135T-1XXSXXXYNT1
XX	CHECK	DATE	SIZE	A4	TITLE:
X.XXX	± 0.25		180° DIP		PHI2.54 SINGLE ROW
Angle	± 0.15	DATE	SHEET	1/1	H=3.5
APPROVE		DATE	PROJ.		Customer NO.
CHANGE					
REV	DATE	MODIFICATION DESCRIPTION			
A0	2012/08/02	NEW			

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com