

# HSF


**NOTES:**

Rated Current:3.0AMP.  
 Rating Voltage:250V AC/DC  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-25℃ to +85℃  
 Insulator Material:PA66 UL94V-0  
 Use with:WF2541-T  
 Mated with:WF2541-Wafer

## Ordering Information

WF2541 - H XX X 0 1

No.of Pins      Colour      Packing  
 02-16P            E=Beige 0=PE Bag

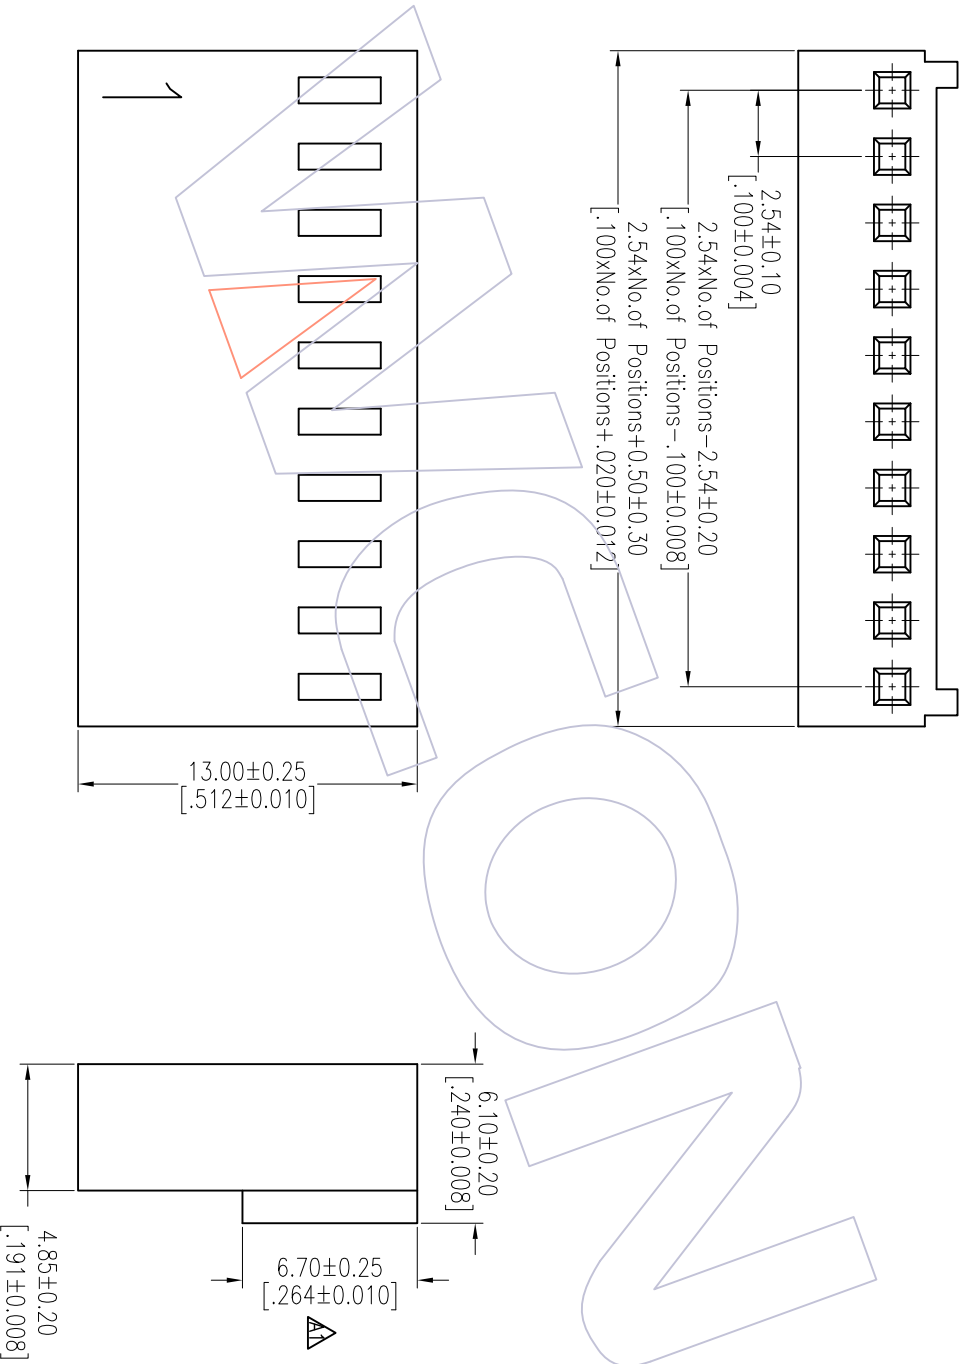

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	SCALE	FIT	PART NO.	<b>WCON</b> Http: www.wcon.com WCON-Dongguan      WCON-Kunshan Tel: +86 769 85358920      Tel: +86 512 57468408 Fax: +86 769 85358915      Fax: +86 512 57468468 E-mail: sales@wcon.com      E-mail: sales@wcon.com
A1	2013/09/02	MODIFY THE DIM	△	X.XX ±0.40	UNIT	mm	WF2541-HXXX01	
A0	2012/09/07	NEW		X.XXX ±0.25	SIZE	A4	TITLE: "M" TYPE 2.54mm Housing	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	SHEET	1/1	Customer NO.	
				DIM TOL	PROJ.			
					APPROVE			
					DATE			
					CHECK			
					DATE			
					DATE			
					DATE			
					DATE			
					DATE			
					DATE			

# WCON

WCON-Dongguan      WCON-Kunshan  
 Tel: +86 769 85358920      Tel: +86 512 57468408  
 Fax: +86 769 85358915      Fax: +86 512 57468468  
 E-mail: sales@wcon.com      E-mail: sales@wcon.com