HSF

NOTES:
Rated Current:5.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:−25℃ to +85℃

Insulator Material:PA66 UL94V−0
Use with:WF3961−T
Mated with:WF3961−Wafer

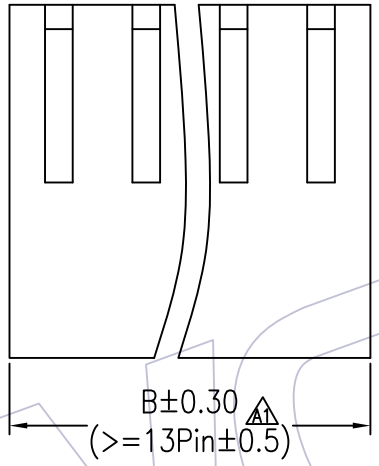

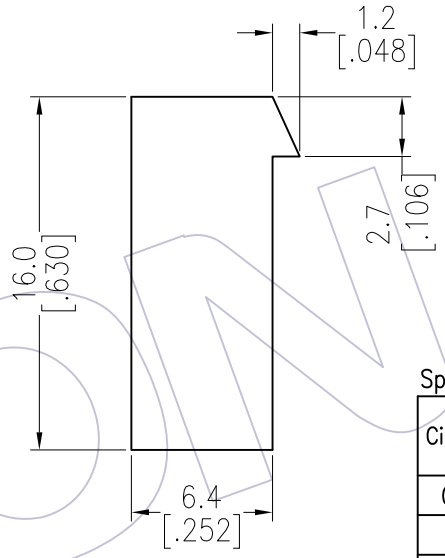

Ordering Information

WF 3961 - H XX W 0 1

- XX: No.of pins, 02Pin~20Pin
- W: Color, E=Beige, W=White
- 0: Packing, 0=PE Bag

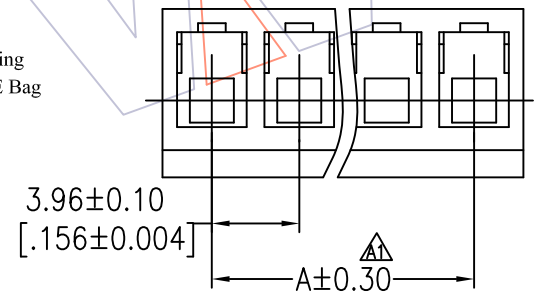

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B A1
02	WF3961−H02W01	3.96	8.68
03	WF3961−H03W01	7.92	12.64
04	WF3961−H04W01	11.88	16.60
05	WF3961−H05W01	15.84	20.56
06	WF3961−H06W01	19.80	24.52
07	WF3961−H07W01	23.76	28.48
08	WF3961−H08W01	27.72	32.44
09	WF3961−H09W01	31.68	36.40
10	WF3961−H10W01	35.64	40.36
11	WF3961−H11W01	39.60	44.32
12	WF3961−H12W01	43.56	48.28
13	WF3961−H13W01	47.52	52.24
14	WF3961−H14W01	51.48	56.20
15	WF3961−H15W01	55.44	60.16
16	WF3961−H16W01	59.40	64.12

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2016/08/23	MODIFY DIM. B	A1
A0	2012/09/11	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Surong Xu	DATE	2016/08/23
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm / inch
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. SEE TAB

TITLE: "M"TYPE 3.96 WAFER HOUSING

Customer NO.

WCON
Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E−mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E−mail: salesks@wcon.com

WCON