

HSF


NOTES:

- Rated Current:18.0 AMP
- Contact Resistance:8.0 milliohm Max
- Withstand Voltage:2000 V AC/DC
- Insulation Resistance:1000 Megohm min
- Operation Temperature:-40°C to +105°C
- Housing Material:PAP66+30%GF(UL94V-0)
- Contact Material:Brass
- Terminal Plating:
Matte Tin Plated Over Nickel




Ordering Information:

P M 750- 1 S XX A SM 3

M=Male Pitch No. of Pins Color Contact Plated Series No.
 750=7.50 02-20P A=Green SM=Male Tin

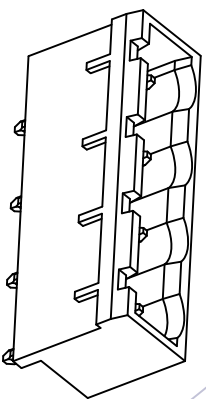

3D VIEW(REF.)
SCALE 1:2

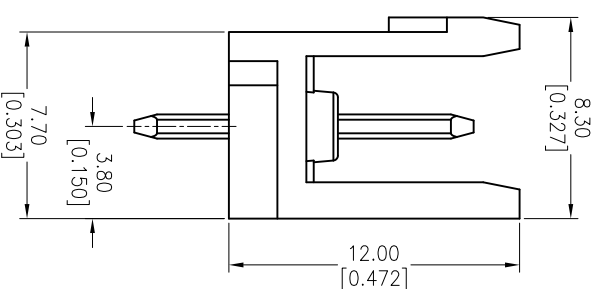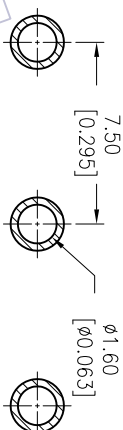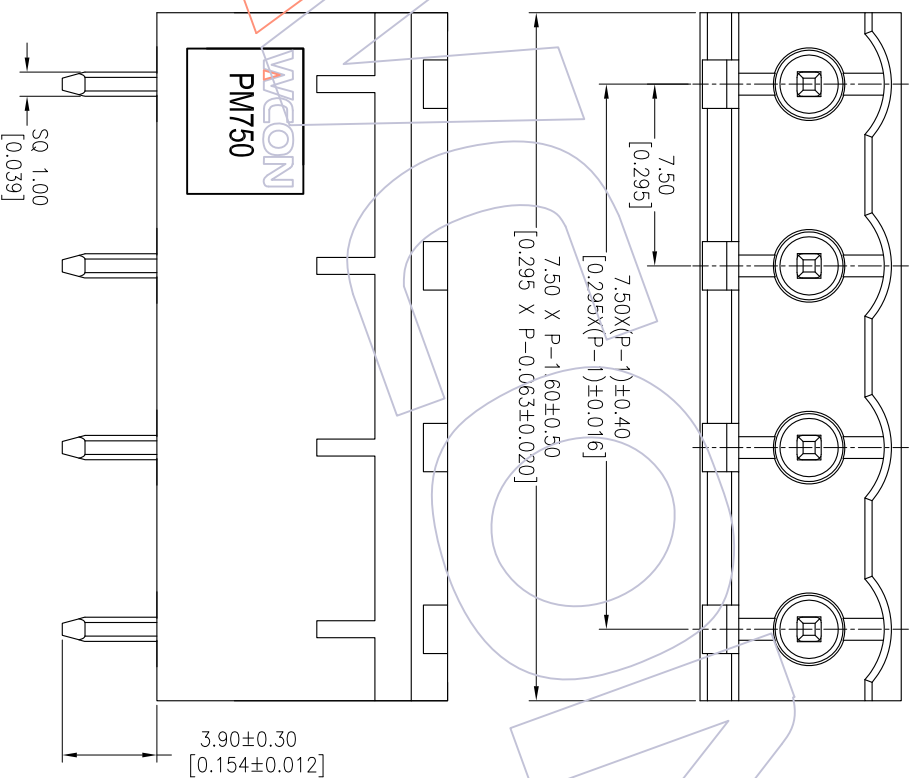

OPERATION		DRAW		DATE		SCALE		PART NO.	
XX		Tsingsn		2013/11/06		FIT		PM750-1SXXASW3	
XX		CHECK		DATE		UNIT		TITLE:	
XX		±0.25				mm		7.50mm Pitch Male	
X.XXX		±0.15		DATE		inch		Pluggable Terminal Blocks	
Angle		APPROVE		DATE		A4		Customer NO.	
± 3'		PROJ.		DATE		1/1			
DIM TOL		APPROVE		DATE		SHEET			
		DATE		DATE		PROJ.			
CHANGE		DATE		DATE		PROJ.			
MODIFICATION DESCRIPTION		DATE		DATE		PROJ.			
NEW		DATE		DATE		PROJ.			
2013/11/06		DATE		DATE		PROJ.			
REV		DATE		DATE		PROJ.			
A0		DATE		DATE		PROJ.			
1		DATE		DATE		PROJ.			

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Tel: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com