

# HSF

**NOTES:**


Rated Current:18.0 AMP  
 Contact Resistance:8.0 milliohm Max  
 Withstand Voltage:2000 V AC/DC  
 Insulation Resistance:1000 Megohm min  
 Operation Temperature:-40°C to +105°C

Housing Material:PA66+30%GF(UL94V-0)  
 Contact Material:Brass  
 Terminal Plating:  
 Matte Tin Plated Over Nickel





**Ordering Information:**

**P M 762- 1 S XX A SM 1**

M=Male Pitch No. of Pins Color Contact Plated Series No.  
 762=7.62 02-20P A=Green SM=Matte Tin

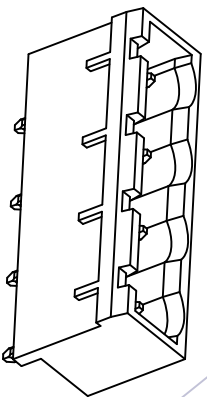

3D VIEW(REF.)  
 SCALE: 1:2

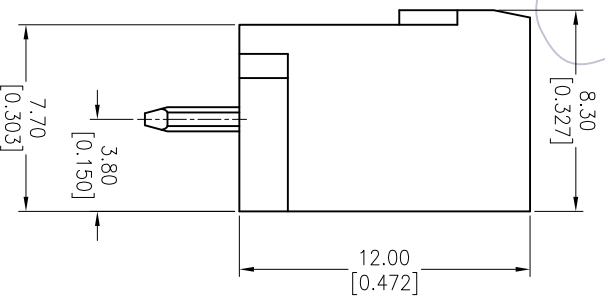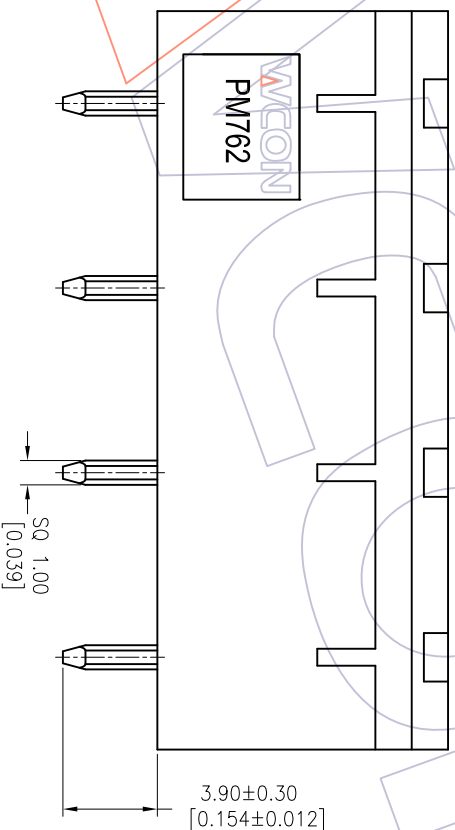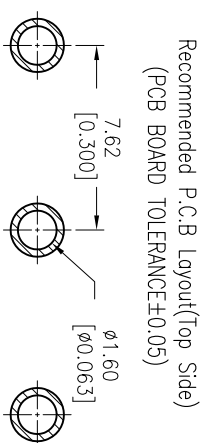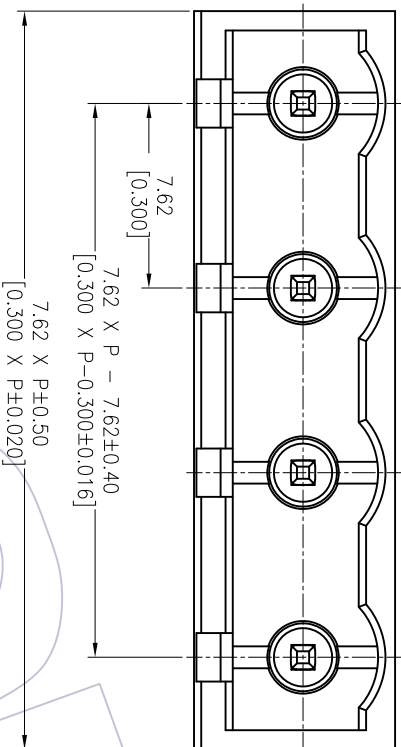

OPERATION	±0.40	DRAW	Tsingn	DATE	2013/10/24	SCALE	FIT	PART NO.	PM762-1SXXASMI	TITLE: 7.62mm Pitch Male Pluggable Terminal Blocks Customer NO.
CHECK	±0.25	CHECK		DATE		UNIT	inch			
ANGLE	±0.15	APPROVE		DATE		SIZE	A4			
DIM	± 3'	PROJ.				SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE							
A0	2013/10/24	NEW								

WCON-Dongguan  
 Http: www.wcon.com  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com