HSF

NOTES:
Current Rating: 2.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material:Brass A1
Contact plating:Au Or Sn over Ni
Insulator Material:PA9T+30%G.F UL94V-0

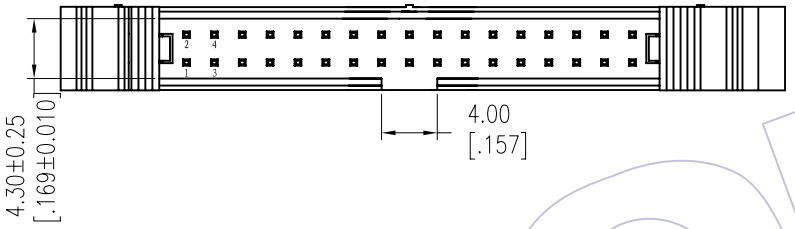

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

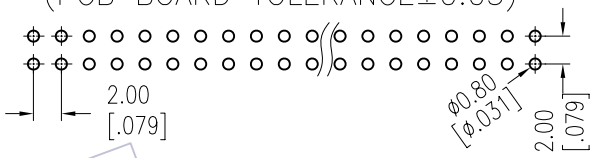



Short Latch
(L=17.00)



Long Latch
(L=20.85)

Ordering Information

3220 - XX S XX B X X1

No.of Pins	Contact Plating	Insulator Color	Latch type	Packing
08 30	G0=Gold Flash	B=Black	L=Long Latch	T=Tube
10 34	G3=10u"Gold	U=Blue	S=Short Latch	
14 40	G4=15u"Gold	G=Grey(427C)		
16 44	G5=30u"Gold	E=Grey(413C)		
20 50	S0=Gold Flash/Tin			
24 60	S3=10u"Gold/Tin			
26 64	S4=15u"Gold/Tin			
68	S5=30u"Gold/Tin			
	SN=Tin			

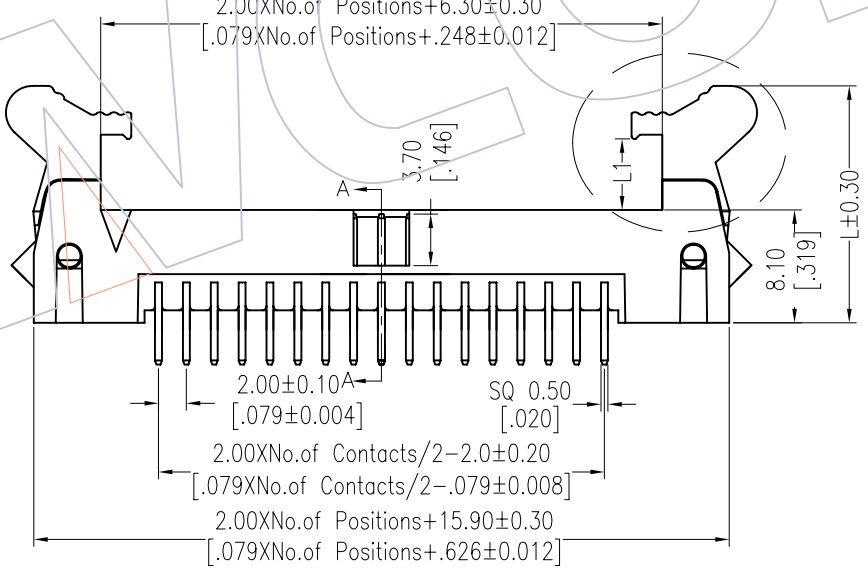

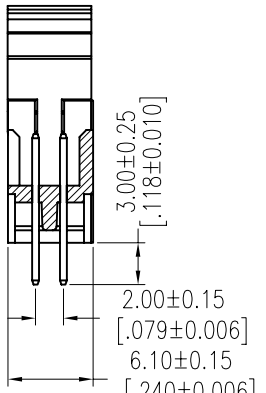

Item	Pitch	Mating
Standard	2.00	5222
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2012/12/24	MODIFY THE NOTES:Phosphor Bronze→ Brass	------
A0	2012/10/08	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2012/12/24
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 3220-XXSXXBXX1

TITLE: 2.00 EJECTOR HEADER 180°

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com