

# HSF

**NOTES:**


Current Rating: 0.5AMP  
 Contact Resistance: 50mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PBT+30%G.F UL94V-0

## Ordering Information

5330 - XX P XX X 0 X

No. of Pins  
 See Table  
 Contact Plating  
 S0=Gold Flash/Ni  
 S3=10u"Gold/Ni  
 S4=15u"Gold/Ni  
 S5=50u"Gold/Ni  
 SN=1in  
 Color Insulator  
 B=Black  
 G=Grey(427C)  
 I=1.90mm  
 2=3.10mm

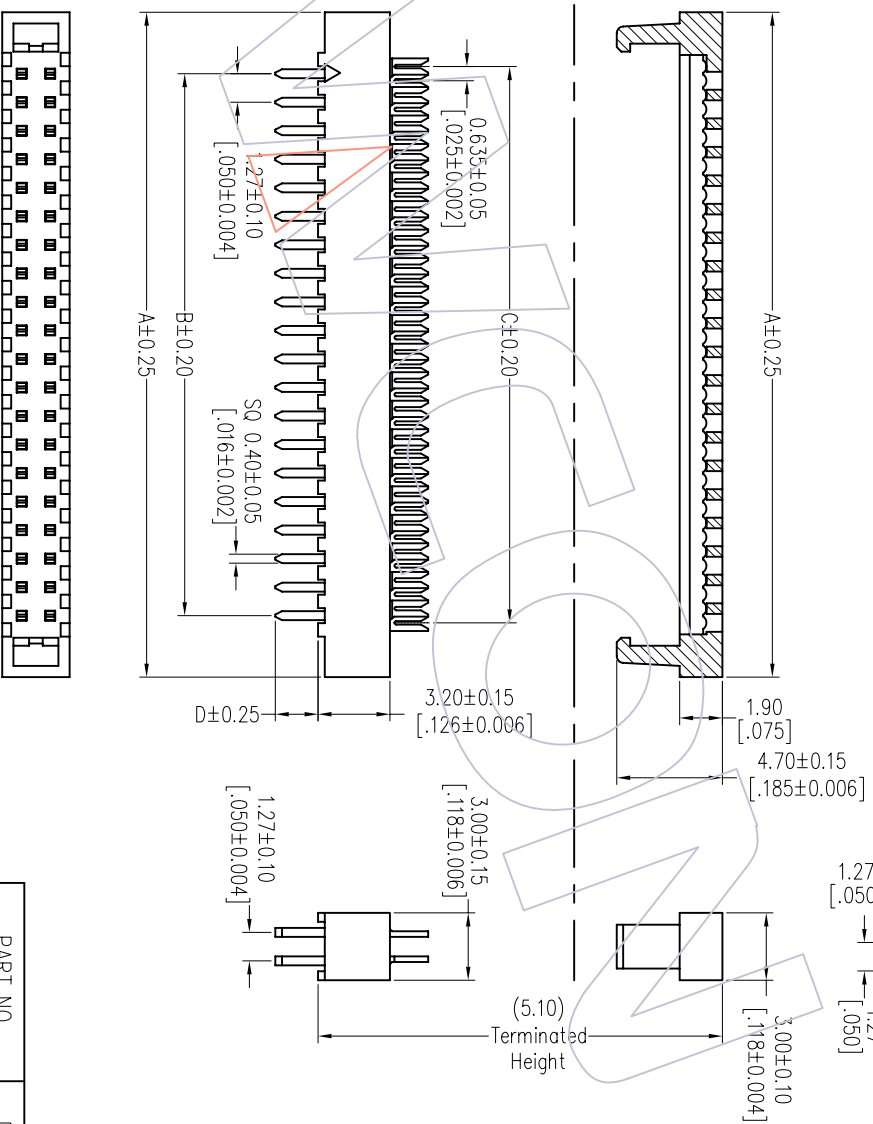

PART NO.	D
5330-XXPXXX01	1.90
5330-XXPXXX02	3.10

No. of Pins	A	B	C
06	7.90	2.54	3.175
08	9.20	3.81	4.445
10	10.50	5.08	5.715
12	11.80	6.35	6.985
14	13.10	7.62	8.255
16	14.30	8.89	9.525
20	16.90	11.43	12.065
22	18.10	12.70	13.335
26	20.70	15.24	15.875
30	23.30	17.78	18.415
34	25.80	20.32	20.955
40	29.60	24.13	24.765
44	32.10	26.67	27.305
50	35.90	30.48	31.115

# WCON

Http: [www.wcon.com](http://www.wcon.com)

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: [sales@wcon.com](mailto:sales@wcon.com)  
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: [sales@wcon.com](mailto:sales@wcon.com)

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuang	2012/10/09	UNIT	mm	SEE TABLE
XX	CHECK	DATE	SIZE	A4	
X.XXX	± 0.15	ANGLE	± 3°	APPROVE	DATE
CHANG	DIM	TOL	PROJ.		Customer NO.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/10/09	NEW	