

# HSF

**NOTES:**

Current Rating: 2.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+30%G.F UL94V-0

## Ordering Information





2243-1 XX S XX CUN T 1

No. of Pins per Row: 02-40Pin

Contact Plating:  
 G0=Gold Flash  
 G3=10μ Gold  
 G4=15μ Gold  
 G5=30μ Gold  
 S0=Gold Flash/Tin  
 S3=10μ Gold/Tin  
 S4=5μ Gold/Tin  
 S5=30μ Gold/Tin  
 SN=Tin  
 SM=Mate Tin

Packing:  
 T=Tube

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

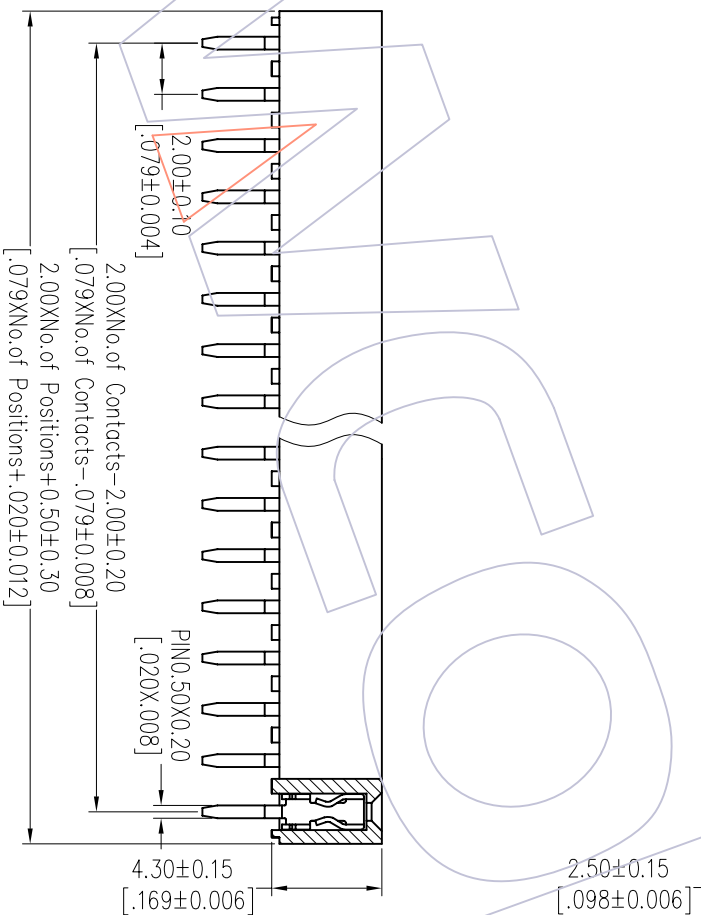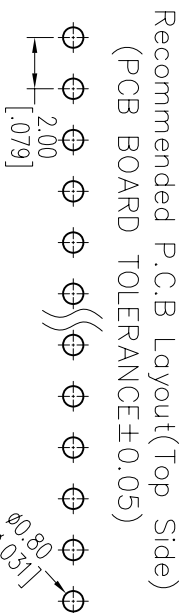

OPERATION		DRAW		DATE		SCALE		PART NO.	
XX	±0.40	JYHuang		2012/07/14		mm		2243-1XXSXXCUNT1	
XX	±0.25	CHECK		DATE		A4		TITLE: FH2.00 SINGLE ROW 180° DIP H=4.3	
X.XXX	±0.15	Angle	APPROVE	DATE		SHEET		Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	PROJ.			
A0	2012/07/14	NEW				1/1			

# WCON

Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com