

HSF



NOTES:

- Current Rating: 1.0A AMP
- Contact Resistance: 30milliohm Max
- Withstand Voltage: 500V AC/Minute
- Insulation Resistance: 100Megohm Min
- Operation Temperature: -25°C to +85°C
- Housing Material: PA9T (UL94V-0)
- Contact Material: Phosphor bronze
- Solder Tab Material: Brass
- Contact plating: Sn over Ni Plating

Ordering Information

WF1256A- WM XX ER 1

Terminal shape: NO. of Pins: 2-15P Packing: R=Reel

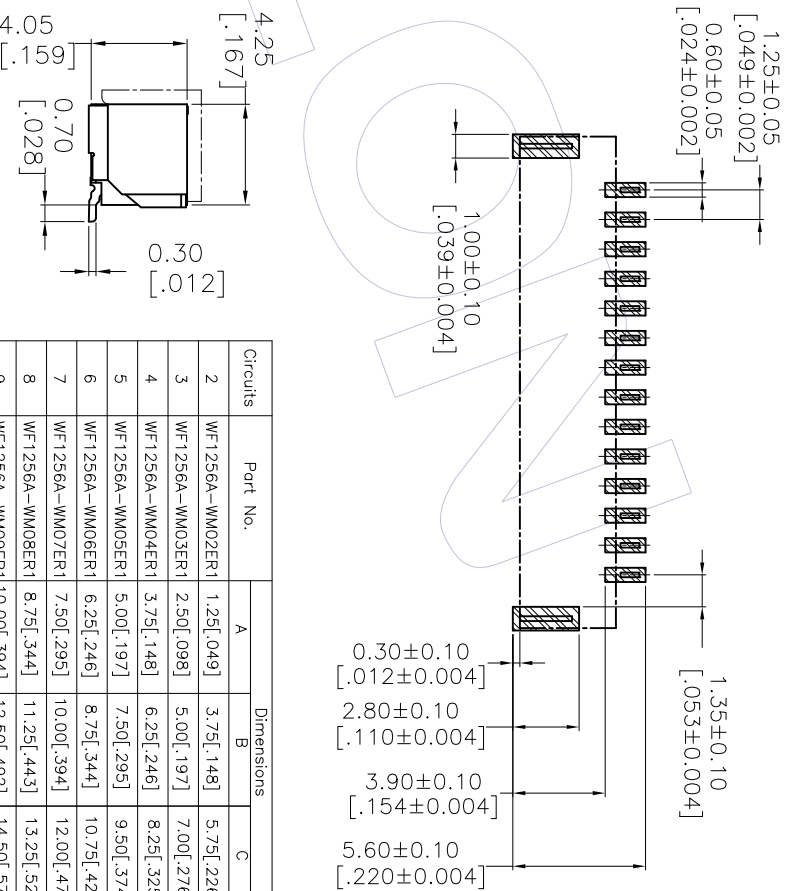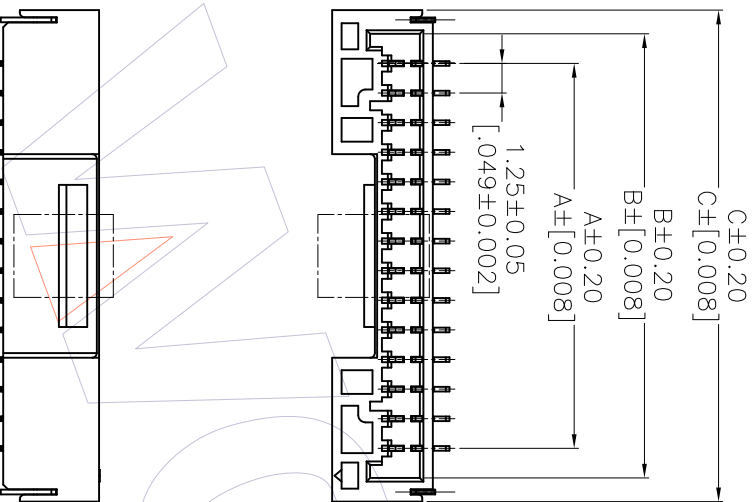

RECOMMENDED PCB LAYOUT
TOLERANCE IS ±0.05

Circuits	Part No.	Dimensions		
		A	B	C
2	WF1256A-WM02ER1	1.25[.049]	3.75[.148]	5.75[.226]
3	WF1256A-WM03ER1	2.50[.098]	5.00[.197]	7.00[.276]
4	WF1256A-WM04ER1	3.75[.148]	6.25[.246]	8.25[.325]
5	WF1256A-WM05ER1	5.00[.197]	7.50[.295]	9.50[.374]
6	WF1256A-WM06ER1	6.25[.246]	8.75[.344]	10.75[.423]
7	WF1256A-WM07ER1	7.50[.295]	10.00[.394]	12.00[.472]
8	WF1256A-WM08ER1	8.75[.344]	11.25[.443]	13.25[.522]
9	WF1256A-WM09ER1	10.00[.394]	12.50[.492]	14.50[.571]
10	WF1256A-WM10ER1	11.25[.443]	13.75[.541]	15.75[.620]
11	WF1256A-WM11ER1	12.50[.492]	15.00[.591]	17.00[.669]
12	WF1256A-WM12ER1	13.75[.541]	16.25[.640]	18.25[.719]
13	WF1256A-WM13ER1	15.00[.591]	17.50[.689]	19.50[.768]
14	WF1256A-WM14ER1	16.25[.640]	18.75[.738]	20.75[.817]
15	WF1256A-WM15ER1	17.50[.689]	20.00[.787]	22.00[.866]

OPERATION	DRAW	DATE	SCALE	PART NO.	TITLE: 1.25 WAFER 180° SMT
X.X	LKP	2012.12.13	1:1	WF1256A-WMXXER1	
X.XX	CHECK	DATE	UNIT	Customer NO.	
±0.25			mm		
X.XXX	APPROVE	DATE	inch		
±0.15			A4		
Angle			SHEET		
± 3°			1/1		
DIM	TOL	PROJ.			



WCON - Dongguan
Tel: +86 769 8538920
Fax: +86 769 8535915
E-mail: sales@wcon.com

WCON - Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com