

HSF

NOTES:


Rated Current:18.0 AMP
Contact Resistance:8.0 milliohm Max
Withstand Voltage:2000 V AC/DC
Insulation Resistance:1000 Megohm min
Operation Temperature:-40°C to +105°C

Housing Material:PA66+30%GF(UL94V-0)
Contact Material:Brass
Terminal Plating:
Matte Tin Plated Over Nickel


Ordering Information:

P M 750- 1 R XX A SM 3


M=Male Pitch No. of Pins Color Contact Plated Series No.
750=7.50 02-20P A=Green SM=Male Tin

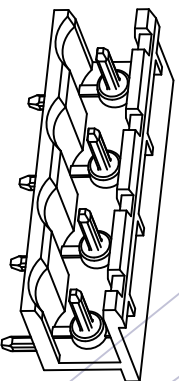

3D VIEW(REF.)
SCALE: 1:2

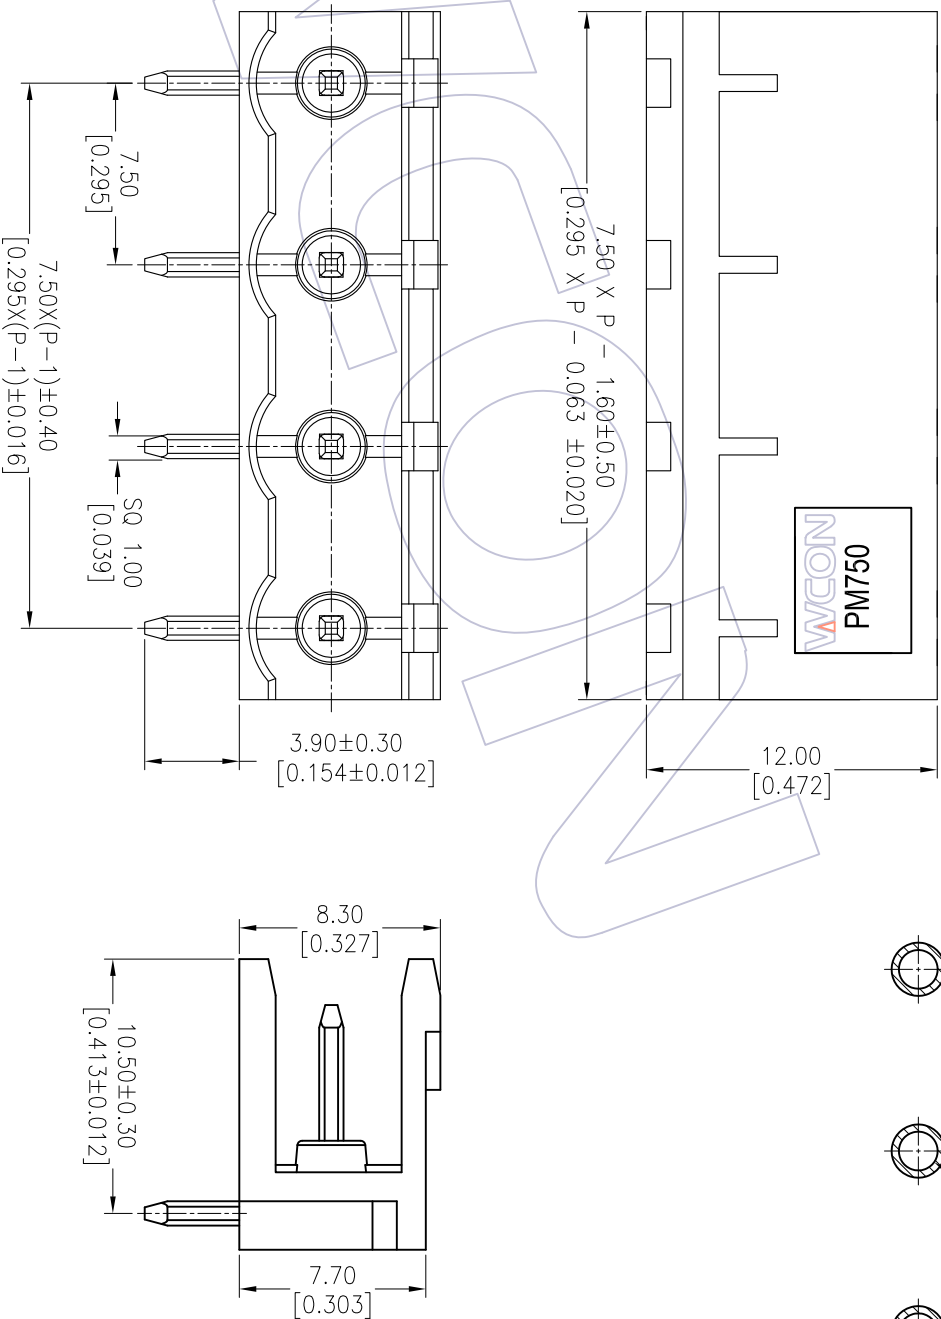

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

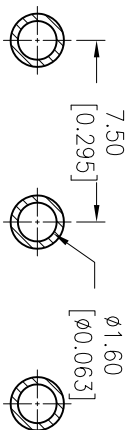

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2013/11/06	NEW		XX ±0.40	Tsingn	2013/11/06	mm inch	A4	PM750-1RXXASM3	7.50mm Pitch Male Pluggable Terminal Blocks	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
				XXX ±0.25	CHECK	DATE	SIZE	SHEET				
				XXX ±0.15	APPROVE	DATE	PROJ.					
				Angle ± 3'								
				DIM TOL								

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com